


Bar Pager System

Tekniske specifikationer



Receiveren har en stand-by tid på 48 timer, efter en opladning på 10 timer.

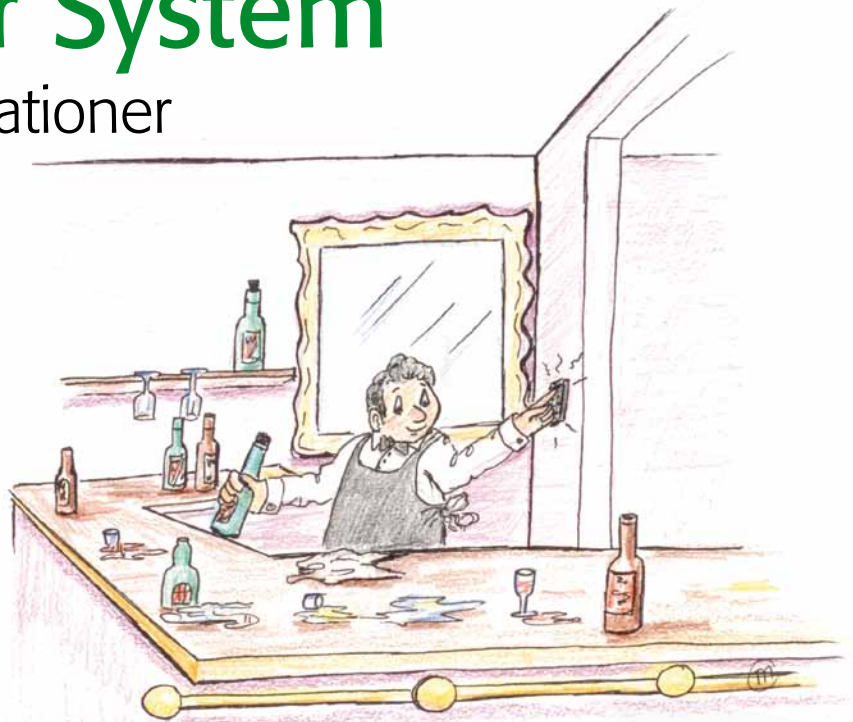

Pager med vibrator og buzzer og mulighed for auto-kvittering.



Bar Alarm - Transmitter

| | |
|---------------------|-------------------------|
| Power supply: | 12-15 volt DC/Max. 75mA |
| Dimensions: | 90 x 148 x 27 mm |
| Weight: | 150 g. |
| Frequency: | 433,92 MHz (ISM Band) |
| Output power: | 9,99 mW |
| Antenna impedance: | 50 Ohm |
| Antenna connection: | SMA |
| Adaptor: | 230-240 Vac |
| RoHS compliant: | Yes |
| CE: | Yes |

Bar Alarm - Receiver

| | |
|----------------------|------------------------|
| Battery: | 2.4 volt - 400mAh NiMH |
| Stand-by time: | 48 hours |
| Charge time: | 10 hours |
| Dimensions: | 47 x 96 x 23 mm |
| Weight: | 75 g. |
| Frequency: | 433,92 MHz (ISM Band) |
| Output power: | 9,99 mW |
| Adaptor: (medfølger) | 230-240Vac - 12 volt |
| RoHS compliant: | Yes |
| CE: | Yes |

